


AZ 40 HTE

Gravity and Pressure Spray Guns

HTE
HIGH TRANSFER EFFICIENCY

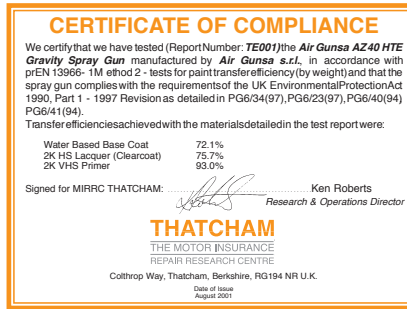

- Cup available 600ml or 200 ml
- Reduced weight (about -20%)
- More manoeuvrability
- New air valve
- Fluid needle and fluid nozzle in stainless steel AISI 303
- Fluid needle packing in PTFE
- New high atomization air cap sets
- Gun bodies coated in PTFE for easy cleaning
- Low air consumption
- Polyethylene cups with antidrop



AZ 40 HTE

Model	ø mm	bar	Nl/min	m ³ /min	mm	g		
AZ40 HTE	0.8	2.5	130	60	100	510	PCG AZ 600 140	
	1.0			90	110			
1.2	120			130				
AZ40 HTE AV	1.5		170	170	140		PCG AZ 200 80	
	1.8		200	210	150			
	2.0			230	160			
AZ40 HTE SP	0.8	2.5	130	100	150	415	NO	
	1.0			160				
1.2	150			170				
AZ40 HTE SP AV	1.5		170	200	190			AZ40 HTE SP AV
	1.8		200	200	200			
	2.0			250	210			



AZ 40 HTE SP

Max. Working Pressure: 7.0 bar (98 PSI) Noise Level (LAeqT) 75.6 dB (A)
Temperature range: 5~40° C Air nipple: G 1/4" Fluid nipple: G 1/4"

CE **Ex** **II 2 G X**

declaration of ATEX conformity for use in zone 1 and in zone 2

Air Flow Control Valve
OPTIONAL